


DENSO

Member of the TOYOTA Group

Superior ID-Technology

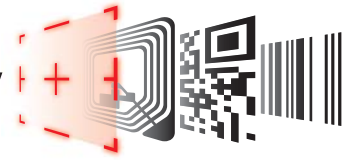

Bar Code Handy Terminal



BHT-300 Series

The New Standard in BHT Scanners

Note

Carefully read the user manual before using the device. Specifications are subject to change without notice. Information current as of June 2004.

Accessories

- Hand strap
- Lithium-ion battery BT-20L
- Operating manual





Optional Accessories (not supplied)



- Communication units:
CU-301 (RS-232C)
CU-321 (USB)
CU-311 (LAN) (available shortly)
- Battery charger for the main power supply battery (CH-351)
- Soft case and belt case (available shortly)

Dimensions (in mm)

BHT-300 Series

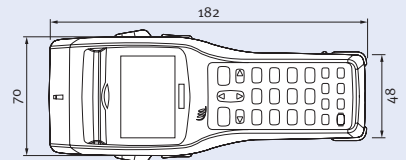

CU-300 Series



Technical Data CU 300

			CU-301	CU-321 ⁽¹⁾
Communication	BHT ← → CU (Communication unit)	Communication system	IrDA-SIR Ver. 1.2 (Low Power) compliant	
		Communication speed	115.2 Kbps max	
	CU ← → Host	Communication system	RS-232C	USB 1.1 Full Speed compliant
Display	LEDs	Power, communication		
Battery charger	Charge time	4 hours	9 hours ⁽²⁾	
Power source		AC/DC adapter	From connected device	

(1): Connection may not be possible depending on the type of PC or USB hub being used. First check if they are compatible. The AC/DC adapter (not included in the scope of delivery) is required for recharging or discharging the battery if no power supply is available via the connected device, such as when this is switched off or is in standby mode.

(2): Charge time may vary according to the power supplied by the connected device. Charge time with the AC/DC adapter is 4 hours.

Company Stamp