




SUMITOMO ELECTRIC

Lynx-CustomFit™ Splice-On Connector

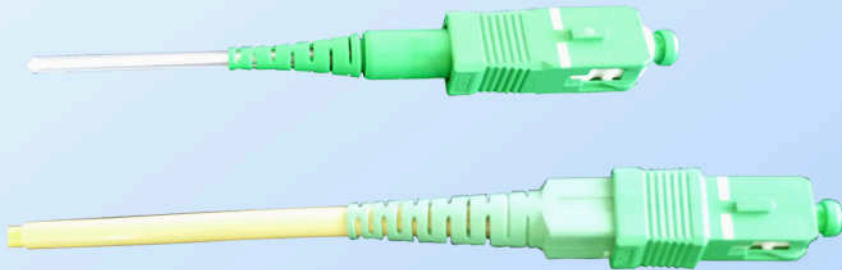

No matching gel

No adhesives


No polishing

Fusion spliced field installable connectors





Telcordia GR-326 compliant

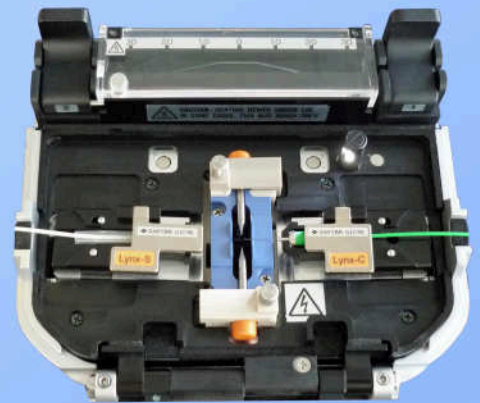Easy, reliable connectorisation and fully SC compatible

Direct termination of cord or fibre saves space in closures and ODFs



Range

Fibre	SMF (G652) and MMF (50um & 62.5um GI)			
Coating	250um primary, 900um tight & semi-tight secondary 2mm & 3mm ruggedised cord			
Connector length	Fibre type: 55.4mm, Cord type: 62mm			
Polishing	APC (SMF)	UPC (SMF)	PC (MMF50)	PC (MMF62.5)
Insertion loss (typ)	0.2dB	0.2dB	0.1dB	0.1dB
Return loss (typ)	65dB	≥55dB	30dB	30dB
Colour				

Ordering information

Model	Description	Colour
LYNX-SC.APC-SM-250/900	SC/APC Lynx CustomFit™ SOC 250/900um SMF	Green
LYNX-SC.APC-SM-2	SC/APC Lynx CustomFit™ SOC 2mm cord SMF	
LYNX-SC.APC-SM-3	SC/APC Lynx CustomFit™ SOC 3mm cord SMF	
LYNX-SC.UPC-SM-250/900	SC/UPC Lynx CustomFit™ SOC 250/900um SMF	Blue
LYNX-SC.UPC-SM-2	SC/UPC Lynx CustomFit™ SOC 2mm cord SMF	
LYNX-SC.UPC-SM-3	SC/UPC Lynx CustomFit™ SOC 3mm cord SMF	
LYNX-SC.PC-M5-250/900	SC/PC Lynx CustomFit™ SOC 250/900um MMF50	Black
LYNX-SC.PC-M5-2	SC/PC Lynx CustomFit™ SOC 2mm cord MMF50	
LYNX-SC.PC-M5-3	SC/PC Lynx CustomFit™ SOC 3mm cord MMF50	
LYNX-SC.PC-M6-250/900	SC/PC Lynx CustomFit™ SOC 250/900um MMF62.5	Gold
LYNX-SC.PC-M6-2	SC/PC Lynx CustomFit™ SOC 2mm cord MMF62.5	
LYNX-SC.PC-M6-3	SC/PC Lynx CustomFit™ SOC 3mm cord MMF62.5	

FTK-HRCSS

Lynx CustomFit™ SOC Preparation Toolkit

Lynx-S and Lynx-C fibre holders
 Sheath strip & slit tool for 2mm & 3mm cord
 Crimping tool for 2mm and 3mm cord termination
 Kevlar® cutting tool
 Alcohol dispenser bottle
 Fibre stripping tool
 Black marker pen
 Carrying case

Specifications are measured using Sumitomo fibre, Sumitomo standard tools and master plug

Tools and accessories

