

Multi-standard, Multi-format Compact Waveform Rasterizers

► WVR5000 • WVR4000



The WVR5000 and WVR4000 Compact Video Rasterizers provide an ideal solution for basic video and audio monitoring needs in a convenient 1 RU half-rack form-factor, suitable for space-constrained environments.

These versatile instruments provide options to accept power from a 12 VDC source or a 100-240 VAC converter.

Both models come standard with support for 16 channels of Embedded Audio and 1 input for 2 channels of Digital AES audio.

WVR5000

Supports HD-SDI (SMPTE 292M) and SD-SDI (ITU-R BT.601) monitoring applications. It provides HD/SD format autodetect.


WVR4000

Supports SD-SDI (ITU-R BT.601) monitoring only.

These instruments provide the reliability of the Tektronix waveform monitors family in a compact, basic monitoring product.

Tektronix Excellence

WVR5000 and WVR4000 offer uncompromised monitoring quality with sharp CRT-like traces, patented Gamut displays, picture thumbnail, display freeze and an error log for 10,000 events for efficient content compliance verification.

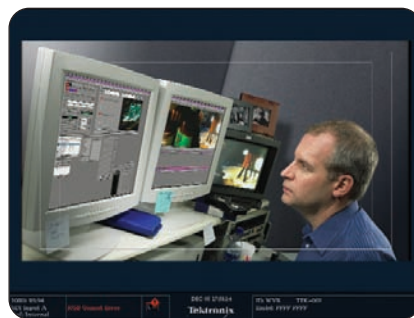

Digital Audio and Video Monitoring in One Instrument

These instruments provide standard digital audio monitoring with audio bars, Lissajous displays, and front panel headphone port for easy compliance verification of digital audio without the need for an additional piece of equipment.

Ease of Use

The intuitive user interface provides backlit buttons, and online help.

32 user-configurable presets allow users to recall commonly used configurations tailored to your personal work practices. These presets can be transferred to and from other units (same model) via the front panel USB port.

The passive loopthrough inputs allow for transparent monitoring at any point of the signal path even if instrument power is off.

An Ethernet port allows for easy download of screen shots and the error log.

► Features & Benefits

Convenient 1 RU Half-rack Instrument, Ideal for Space-constrained Environments

AC and DC Power Options

Patented Gamut Displays Facilitate Compliance Verification

The Sharpest CRT-like Waveform Trace Quality

Error Log for 10,000 Events Simplifies Error Correction Tasks

Fully Digital Processing for Accurate, Repeatable, Drift-free Operation

Ethernet Port Allows for Easy Download of Screen Shots and Error Log

Freeze Mode for Trace and Picture Displays

Equipped Standard with Monitoring Capacity for 16 Channels of Embedded Audio (up to 8 Simultaneously) and 1 AES Audio Input

Front Panel Headphone Port for Easy Monitoring of Audio Channels

Audio Bars and Lissajous Displays for Verification of Audio on the Same Instrument

32 User-configurable Presets for Quick Recall of Commonly Used Configurations

User-definable Safe Area Graticules Facilitate Editing Tasks

Picture Thumbnail With Line-select Marker

Intuitive User Interface, Backlit Buttons, And Online Help

High-resolution DVI-I Output for Crisp, Easy-to-Read Displays

Passive Loopthrough Inputs for Transparent Monitoring at any Point of the Signal Path even when Instrument Power is off

Front Panel USB Port for Easy Transfer of Instrument Presets

► Applications

Confidence Monitoring of SDI Video and Uncompressed Digital Audio

Compliance Checking in Distribution and Broadcast

Content QA in Production and Post-production

Multi-standard, Multi-format Compact Waveform Rasterizers

► WVR5000 • WVR4000




See and Solve with Tektronix Displays

The **See and Solve** displays in Tektronix video monitors simplify video monitoring tasks such as calibration, error detection and content correction allowing them to detect errors at a glance and troubleshoot them efficiently.

Tektronix displays offer the sharpest CRT-like trace quality for clear and accurate video and audio monitoring with the look and feel of an analog display. With several sweep rates and easy control of vertical gain and horizontal magnification, you can efficiently monitor and measure video waveform parameters.

Specialized displays provide summarized, yet comprehensive reports of alarms, session and status of content. Powerful displays such as Video Status show in a condensed way error statistics, signal format, presence of ancillary data and more. These Tektronix exclusive displays simplify monitoring tasks by providing important content information at a glance.

The vector display offers user-selectable graticules, color target and color axis.

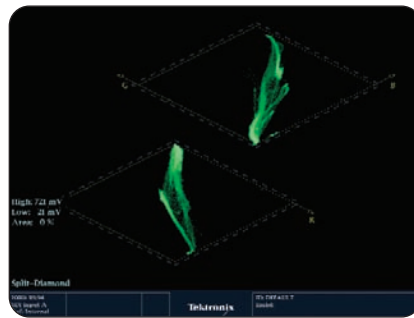


Patented Tektronix Gamut Displays – Efficiently Detect and Correct Gamut Problems

The patented Tektronix Diamond and Split Diamond displays enable Colorists, Editors, and Operators to visualize whether the content is RGB Gamut-compliant with a single glance. Plus, they are designed to help isolate the Out-of-Gamut component just as easily.

For SDI component content that is destined for broadcast in composite systems, the unique Tektronix Arrowhead display can be used to monitor Composite Gamut compliance without the need for a separate encoder. Within this display, a separate upper and lower luma-only Gamut limit can be applied. This display is very useful for camera balancing.

Each of these displays offers user-selectable Gamut thresholds so operators can set monitoring limits appropriate to their specific operation. In addition, Gamut monitoring is fully integrated with the powerful alarm logging and reporting capability of the WVR5000 and WVR4000.

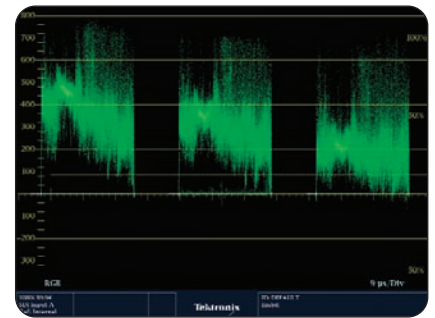

Sharp Waveform Display – CRT-like Trace Quality

A complete range of display options lets users choose between parade and overlay presentation of SDI signals in RGB, YPbPr, YRGB or pseudo-composite formats.

Full horizontal timing flexibility is provided with 1Line, 2Line, 1Field and 2Field sweep modes, with or without magnification.

Both fixed and variable vertical gains are offered, each with the outstanding accuracy and repeatability that comes from a fully digital design.

The Line Select provides a line marker in full screen and thumbnail picture modes.

Vector Display

The vector display is offered with selectable 75% and 100% targets.

Each display automatically selects the appropriate graticule based on the input format.



Picture Display – Quick Visual Confirmation and Precision Content Adjustment

For a qualitative view of the content, a full-color picture display is offered, which can be displayed as a full-screen presentation. This display is compatible with all input formats and features automatic adjustment for aspect ratio and number of active lines.

You can select “brightup” conditions that show the location of RGB or composite gamut errors on the picture display. The line-select mode shows the location of the line currently selected within the picture display.

Users can choose from several Safe Action and Safe Title graticules on the picture display which help Editors and Operators easily identify incorrectly positioned video content such as graphics, titles, or logos.

Graticule choices include the Safe Action and Safe Title graticules defined in SMPTE RP218, ITU, and ARIB, standards, plus two sets of totally flexible, user-definable graticules.

These graticules facilitate editing tasks and reduce the need for format conversions.




Alarms, Quality Statistics and Logging – Thorough and Fast Content Verification

The WVR5000 and WVR4000 offer a variety of displays designed to show status at a glance, in addition to the status bar continually displayed at the bottom of the screen.

A comprehensive overview of the video content status is presented in the Video Session display. Offering a time-based compilation of information, this screen is ideal for presenting evidence of compliance after content screening. Information on input format and session time is presented, along with statistics on Error Detection and Handling (EDH)/Cyclic Redundancy Check (CRC) and Gamut errors.

The Alarm Status display, provides continuous information on the state of each condition currently being monitored by the instrument.

To support unattended monitoring applications, as well as provide documentation for service level agreements, these instruments maintain an error log of 10,000 events, which facilitates the detection and correction of problems. Log entries are recorded with date, time-of-day and time code (VITC, LTC, ANC). The error log can be downloaded to TXT or HTM formats for easy record keeping and processing on spreadsheets or database software.

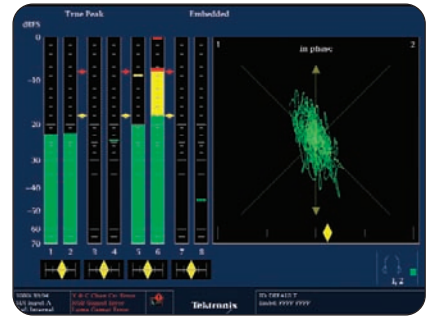

Digital Audio Capabilities – Equipped Standard

Audio monitoring capabilities for both digital AES and Embedded audio are available as standard in the WVR5000 and WVR4000.

The instruments feature Level Bars display and both Bars and Lissajous display. These displays can be selected to provide monitoring for both embedded and AES digital audio formats with up to eight channels (two channels for AES Audio).

The level meters offer selectable meter ballistics and scaling plus they are user-configurable. The over and silence settings augment digital clip and mute detection by letting users select levels to represent these conditions in the analog audio domain.

The Audio Session display records the highest true peak, as well as the number of mutes, clips, overs and silences during the session time. Tektronix instruments provide accurate peak level measurements.

Multi-standard, Multi-format Compact Waveform Rasterizers

► WVR5000 • WVR4000

► Characteristics

Video Input and External Reference Formats

The WVR5000 and WVR4000 rasterizers accept a wide variety of input signal formats and external references. The following chart illustrates all the video inputs (first column), cross referenced with their compatible external references.

Supported Input Formats	External Reference Inputs									
	NTSC		PAL		720p		1080p/sF			1080i
	59.94 Hz	50 Hz	50 Hz	59.94 Hz	60 Hz	23.98 Hz	24 Hz	50 Hz	59.94 Hz	60 Hz
483i, 59.94 Hz (525), BT601*1	X			X					X	
576i, 50 Hz (625), BT601*1		X	X					X		
720p, 23.98 Hz*2	X			X		X			X	
720p, 24 Hz*2					X		X			X
720p, 25 Hz*2		X	X					X		
720p, 29.97 Hz*2	X			X					X	
720p, 30 Hz*2					X					X
720p, 50 Hz*2		X	X					X		
720p, 59.94 Hz*2	X			X		X			X	
720p, 60 Hz*2					X		X			X
1035i, 59.94 Hz*2	X			X					X	
1035i, 60 Hz*2					X		X			X
1080i, 50 Hz*2		X	X					X		
1080i, 59.94 Hz*2	X			X					X	
1080i, 60 Hz*2					X		X			X
1080p, 23.98 Hz*2	X			X		X			X	
1080p, 24 Hz*2					X		X			X
1080p, 25 Hz*2		X	X					X		
1080p, 29.97 Hz*2	X			X					X	
1080p, 30 Hz*2					X					X
1080sf, 23.98 Hz*2	X			X		X			X	
1080sf, 24 Hz*2					X		X			X
1080sf, 25 Hz*2		X	X					X		
1080sf, 29.97 Hz*2	X			X					X	
1080sf, 30 Hz*2					X					X

*1 Available with the WVR5000 and WVR4000.

*2 Available with the WVR5000 only.

The monitor will automatically detect the signal format and establish the appropriate settings for the various displays. You can select an expected signal format from the list of supported formats. If the expected format and detected format differ, the instrument will report a format mismatch.

The instrument will signal a format mismatch if the applied external reference format is not compatible with the input signal.

► Serial Digital Video Interface

Inputs	2, only one active at a time For WVR5000, the inputs auto detect between HD and SD signals
Input Type	Passive loopthrough BNC, 75 Ω compensated
Input Level	800 mV peak-to-peak, $\pm 10\%$
Return Loss	≥ 25 dB from 1 MHz to 270 MHz, power on ≥ 15 dB from 1 MHz to 270 MHz, power off >15 dB from 1 MHz to 1.5 GHz, power on or off
Loopthrough Insertion Loss	For HD, equivalent to 10 m of type 8281 cable
Loopthrough Isolation	>50 dB to 300 MHz
Receiver Equalization Range	Typically for SD, to 250 m of type 8281 cable; for HD to 100 m of type 8281 cable
Monitor Output	Signal Format (DVI-I Output) – 1024x768, 59.94 Hz vertical rate

► External Reference

Sync Formats	NTSC and PAL and tri-level sync
Input Type	Passive loopthrough BNC, 75 Ω compensated
DC Input Impedance	20 k Ω , nominal
Return Loss	>40 dB to 6 MHz, >35 dB to 30 MHz
Lock Range	± 50 ppm

► Serial Digital Waveform Vertical Characteristics

Vertical Measurement Accuracy	At x1 gain, $\pm 0.5\%$ of 700 mV full scale; at 5x gain, $\pm 0.2\%$ of 700 mV full scale
Gain	1x, 5x, variable range 0.25x to >7.5x
Frequency Response	
SD	Luminance (Y) channel $\pm 0.5\%$ to 5.75 MHz, Color Difference channels (Pb, Pr) $\pm 0.5\%$ to 2.75 MHz
HD	Luminance (Y) channel $\pm 0.5\%$ to 30 MHz, Color Difference channels (Pb, Pr) $\pm 0.5\%$ to 15 MHz

Multi-standard, Multi-format Compact Waveform Rasterizers

► WVR5000 • WVR4000

► Waveform Horizontal Deflection

Sweep Timing Accuracy	±0.1%
Sweep Linearity	±0.1%

► Audio Characteristics

Level Meter Resolution	0.056 dB steps at 30 dB scale from full scale to -20 dBFS
	0.20 dB steps at 70 dB scale for signals above -20 dBFS
Meter Ballistics	True peak, PPM type 1, PPM type 2, BBC PPM, extended VU
Defined/Programmable Level Detection	Mute, clip, user programmable silence, over
Level Meter Accuracy Over Frequency	-0.5 dB (for analog), -0.2 dB (for digital) from 20 Hz to 20 kHz, 0 to -40 dBFS sine wave, Peak Ballistic mode
AES Inputs	1 set of 2 channels, 32 kHz, 44.1 kHz, 48 kHz, 96 kHz, 192 kHz, 24 bit
AES Input Characteristics	BNC, 75 Ω terminated, unbalanced, 0.2 V to 2 V peak-to-peak
AES Input Return Loss	>30 dB relative to 75 Ω from 0.1 to 6 MHz

Power

► 12 VDC In

► Power adapter accepts 100 to 240 VAC -10%, 50/60 Hz

Input Voltage

Voltage Range	12 to 15 VDC nominal
	10.75 to 18 VDC min to max operating
Supply Connection	XLR 4 pin male connector
	Pin 1 = V(-)
	Pin 4 = V(+)
	Pin 2,3 NC
Power Consumption	22 W typical, 30 W max
Surge	6 amps at 12 V
Fuse Rating	4 amp internal self-resetting fuse
Transient, Over and Reverse	Reverse and over voltage protected to ±30 VDC
Voltage Protection	The unit may power itself down in the presence of high transient voltages. This prevents damage to the unit and is not a failure

► Physical Characteristics

Dimensions	cm	in.
Height	4.318 cm.	1.7 in.
Width	20.574 cm.	8.1 in.
Depth (front to back including handles and BNCs)	45.72 cm	18.0 in.
Weight	kg	lbs.
Net	1.7 kg	3 lbs, 12 oz

► **Ordering Information****WVR5000**

Waveform Rasterizer with support for HD-SDI and SD-SDI Serial Digital Monitoring (2 passive loopthrough inputs).

Digital audio monitoring in embedded (16 channels) and AES/EBU (2 channels) formats.

Uses same physical inputs for HD and SD — Autodetect between HD and SD.

Note: Please specify Power Option when ordering.

WVR4000

Waveform Rasterizer with support for SD-SDI Serial Digital Monitoring (2 passive loopthrough inputs).

Digital audio monitoring in embedded (16 channels) and AES/EBU (2 channels) formats.

Note: Please specify Power Option when ordering.

► **Power Options****AC-DC Power Adapter**

A0	North America
A1	Universal EURO
A2	United Kingdom
A3	Australia
A5	Switzerland
A6	Japan
A10	China
A11	India

Other

A99	No Power Cord or AC Adapter
-----	-----------------------------

► **Accessories****Rack Mount Accessories for WVR5000/WVR4000**

Full Rack adapter for 1.75 inch rack space	TVGF11A
Full rack adapter for zero clearance mounting	TVF16

► **Service Options**

C3	Calibration Service 3 Years
C5	Calibration Service 5 Years
D1	Calibration Data Report
D3	Calibration Report 3 Years (with C3)
D5	Calibration Report 5 Years (with C5)
R3	Repair Service 3 Years (including warranty)
R5	Repair Service 5 Years (including warranty)
CA1	Provides a single calibration event or coverage for the designated calibration interval, whichever comes first
R1PW	Repair Service Coverage 1 Year post warranty
R2PW	Repair Service Coverage 2 Years post warranty
R3DW	Repair Service Coverage 3 Years (includes product warranty period) starts at the time of customer instrument purchase
R5DW	Repair Service Coverage 5 Years (includes product warranty period) starts at the time of customer instrument purchase

User Manual CD in English, Simplified Chinese and Japanese is supplied with the instrument.

Multi-standard, Multi-format Compact Waveform Rasterizers

► WVR5000 • WVR4000

Contact Tektronix:

ASEAN / Australasia (65) 6356 3900
Austria +41 52 675 3777
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium 07 81 60166
Brazil & South America (11) 40669400
Canada 1 (800) 661-5625
Central East Europe, Ukraine and the Baltics +41 52 675 3777
Central Europe & Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France +33 (0) 1 69 86 81 81
Germany +49 (221) 94 77 400
Hong Kong (852) 2585-6688
India (91) 80-22275577
Italy +39 (02) 25086 1
Japan 81 (3) 6714-3010
Luxembourg +44 (0) 1344 392400
Mexico, Central America & Caribbean 52 (55) 5424700
Middle East, Asia and North Africa +41 52 675 3777
The Netherlands 090 02 021797
Norway 800 16098
People's Republic of China 86 (10) 6235 1230
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea 82 (2) 6917-5000
Russia & CIS +7 (495) 7484900
South Africa +27 11 206 8360
Spain (+34) 901 988 054
Sweden 020 08 80371
Switzerland +41 52 675 3777
Taiwan 886 (2) 2722-9622
United Kingdom & Eire +44 (0) 1344 392400
USA 1 (800) 426-2200
For other areas contact Tektronix, Inc. at: 1 (503) 627-7111
Updated 12 November 2007

For Further Information

Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Product(s) are manufactured in ISO registered facilities.

Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

Copyright © 2007, Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

01/08 HB/WOW

2PW-21469-0

Tektronix
Enabling Innovation