
VARSA



- 10-18V DC or 90-305V AC Input
- Draws .6 amps @120V, .3 amps @ 240V
- Power factor corrected
- Instant on
- Available in daylight or tungsten
- · Color accurate from fixture to fixture
- Stable color through entire dim range
- Flicker-free up to 1500 FPS (full dim range)
- Flicker-free at any speed (at 100%)
- Emits no UV or IR
- Emits no UV or IR
- Long-life LEDs (20,000+ hours)
- Built-in Chimera mount
- DMX controllable
- Two year limited warranty
- ETL & CE compliant



The newest fixture in the Nila line, the Varsa gives you a lot of punch in a small package. It's also the first light in the Nila line that can accept DC voltage directly. That's right, no more inverters. Just connect your own 10V-18V battery and you're ready to go. We even offer yoke-mountable plates for popular gold mount and V-mount camera batteries. The perfect solution just got better!

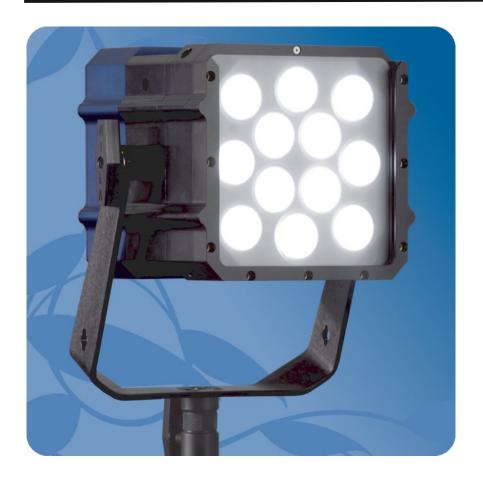

"Nila lighting really has provided us with the ability to add that additional punch without the additional power draw. I couldn't be more happy."

> Craig Yanagi, Manager of Marketing & Brand Strategy JVC Professional Video Products





VARSA

ACCESSORIES



Lenses



Hard Gels




Barn Doors




Battery Plate



Chimera

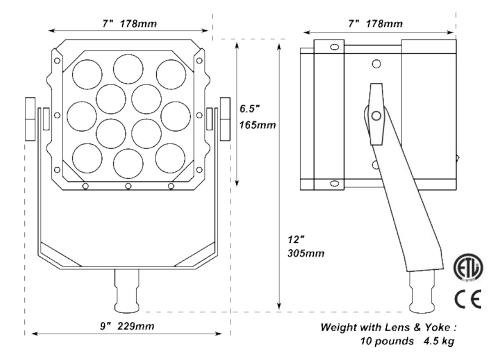

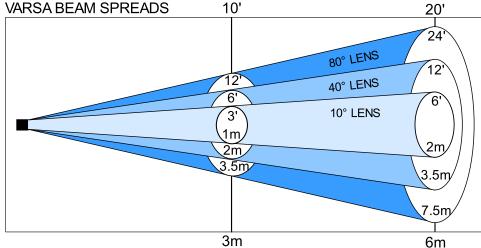

VARSA DAYLIGHT	LENS
	No Lens
	10°
	20°
	40°
	60°
	80°
	10°x 60°

3' (FC)	10' (FC)	20' (FC)
9400	1100	270
4400	410	100
1300	110	30
950	90	23
360	32	8.5
300	26	7
1400	140	34

1m (lux)	3m (lux)	6m (lux)
100000	12000	3000
47000	4500	1100
14000	1200	320
10000	970	240
3600	340	90
3200	280	75
16000	1500	370

ENVIRONMENTALLY SUSTAINABLE **LED LIGHTING**

